


Class 125 WN

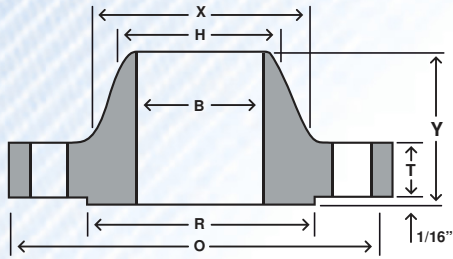

Nom Size								Drilling				Weight
	OD	Thickness	OD of RF	Dia at Base	Bore	Dia Bevel	LTH	Bolt Circle	Bolt Length	Hole Dia	# of Holes	
	O	T	R	X	B	H	Y					
6	11.00	1.00	8.50	7.56		6.63	3.50	9.50	4.00	0.88	8	24
8	13.50	1.13	10.63	9.69		8.63	4.00	11.75	4.50	0.88	8	39
10	16.00	1.19	12.75	12.00		10.75	4.00	14.25	5.00	1.00	12	52
12	19.00	1.25	15.00	14.38		12.75	4.50	17.00	5.00	1.00	12	80
14	21.00	1.38	16.25	15.75		14.00	5.00	18.75	5.50	1.13	12	110
16	23.50	1.44	18.50	18.00		16.00	5.00	21.25	5.75	1.13	16	140
18	25.00	1.56	21.00	19.88		18.00	5.50	22.75	6.00	1.25	16	150
20	27.50	1.69	23.00	22.00		20.00	5.69	25.00	6.50	1.25	20	180
22	29.50	1.81	25.25	24.25		22.00	5.88	27.25	6.75	1.38	20	225
24	32.00	1.88	27.25	26.13		24.00	6.00	29.50	7.00	1.38	20	255
26	34.25	2.00	29.50	28.50		26.00	5.00	31.75	7.25	1.38	24	265
28	36.50	2.06	31.50	30.75		28.00	5.06	34.00	7.50	1.38	28	295
30	38.75	2.13	33.75	32.75		30.00	5.13	36.00	7.75	1.38	28	340
32	41.75	2.25	36.00	35.00		32.00	5.25	38.50	8.50	1.63	28	410
34	43.75	2.31	38.00	37.00		34.00	5.31	40.50	8.50	1.63	32	440
36	46.00	2.38	40.25	39.25		36.00	5.38	42.75	8.75	1.63	32	495
38	48.75	2.38	42.25	41.75		38.00	5.38	45.25	8.75	1.63	32	570
40	50.75	2.50	44.25	43.75		40.00	5.50	47.25	9.00	1.63	36	620
42	53.00	2.63	47.00	46.00		42.00	5.63	49.50	9.25	1.63	36	710
44	55.25	2.63	49.00	48.00		44.00	5.63	51.75	9.25	1.63	40	750
46	57.25	2.69	51.00	50.00		46.00	5.68	53.75	9.25	1.63	40	800
48	59.50	2.75	53.50	52.25		48.00	5.75	56.00	9.50	1.63	44	870
50	61.75	2.75	55.50	54.25		50.00	5.75	58.25	10.00	1.88	44	900
52	64.00	2.88	57.50	56.50		52.00	5.88	60.50	10.25	1.88	44	1000
54	66.25	3.00	59.75	58.75		54.00	6.00	62.75	10.50	1.88	44	1100
60	73.00	3.13	66.00	65.25		60.00	6.13	69.25	11.00	1.88	52	1350
66	80.00	3.38	-	71.50		66.00	6.38	76.00	11.50	1.88	52	1775
72	86.50	3.50	-	78.50		72.00	6.50	82.50	11.75	1.88	60	2100
84	99.75	3.88	-	90.50		84.00	6.88	95.50	13.00	2.13	64	2825
96	113.25	4.25	-	102.75		96.00	7.25	108.50	14.25	2.44	68	3800

To Be Specified by Purchaser.

DIMENSIONS ARE IN INCHES | WEIGHTS ARE IN POUNDS

NOTES: CAN BE FURNISHED WITH A FLAT FACE. THESE FLANGES HAVE THE SAME OD AND DRILLING AS ANSI/ASME B16.1 CLASS 125 CAST IRON FLANGES.

